

Minimizing Fan System Effects

AMCA insite ™ Education Series | AMCA International | www.amca.org





Lisa Cherney

Education Manager, AMCA International **Session Moderator**

- Joined AMCA in February 2019
- Responsible for development of AMCA's education programs; staff liaison for the Education & Training Subcommittee
- Projects include webinars, online education modules, presentations at trade shows, AMCA Speakers Network and other duties as assigned.



Participation Guidelines

- Please place your cell phone on silent or vibrate.
- There will be Q&A at the end of the session.
- To receive PDH credit for attending:
 - Be sure to have your badge scanned by a room monitor so a complete attendee list can be generated.
 - You must be present for the entire session and complete a postsession online evaluation. Partial credit cannot be given for anyone who arrives late, leaves early or does not complete the evaluation.
 - The post-session evaluation will be emailed to everyone within 7 days, and it must be completed to qualify for today's PDH credit.
 If you do not want PDH credit, completing the survey is optional.

Special Gift!

Attend 5 or more of AMCA's educational sessions at AHR Expo and receive a special gift!

- Pick up a session booklet at the front of the room or at the AMCA Booth – C3628
- Get your booklet stamped by AMCA staff in each session.
- Present your stamped booklet at the AMCA Booth to claim your gift.

Gift supplies are limited; first come, first served.

AMCA International has met the standards and requirements of the Registered Continuing Education Program. Credit earned on completion of this program will be reported to RCEP at RCEP.net. A certificate of completion will be issued to each participant. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the RCEP.

Attendance for the entire presentation AND a completed evaluation are required for PDH credit to be issued.



DISCLAIMER

The information contained in this education session is provided by AMCA International as an educational service and is not intended to serve as professional engineering and/or manufacturing advice. The views and/or opinions expressed in this educational activity are those of the speaker(s) and do not necessarily represent the views of AMCA International. In making this educational activity available AMCA International is not endorsing, sponsoring or recommending a particular company, product or application. Under no circumstances, including negligence, shall AMCA International be liable for any damages arising out of a party's reliance upon or use of the content contained in this education session.

COPYRIGHT MATERIALS

This educational activity is protected by U.S. and International copyright laws. Reproduction, distribution, display and use of the educational activity without written permission of the presenter is prohibited.

© AMCA International 2022

David Maletich

Vice President, Marketing
The New York Blower Company

- Over 30 years in the fan industry
- Current ASME Nuclear Air and Gas Treatment "Conagt" committee member and member of various AMCA committees
- Presents fan-related seminars for AMCA, ASHRAE, OSHA, ACGIH, universities and engineering firms



Fan Troubleshooting and System Effects Purpose and Learning Objectives

The purpose of this presentation is to inform industry professionals on the causes of system effect, and how to recognize and minimize these effects.

At the end of this presentation you will be able to:

- 1. Outline how fans are tested and rated in accordance with AMCA Standards 210 & 211.
- 2. Describe how ductwork configurations are affected by the placement of inlet & outlet elbows.
- 3. Compare system effect (in-situ) performance vs. catalog fan performance.

AMCA Accredited Test Lab

(Fan Set-up for Testing)

Ideal Conditions

- Open inlet
- Straight run of ductwork from the outlet
- Run of Outlet duct allows the velocity profile to even out before entering the chamber.
- Fan catalog performance is tested in this manor.



AMCA Accredited Test Lab

(Drive Side View of Test Set-up)

 Torque measuring device to calculate BHP(or kW) consumption.



AMCA Accredited Test Lab

(Chamber)


- On the other side of the bulkhead, lies the test chamber.
- The exhaust fan is used to overcome the resistance within the chamber and allow for a complete curve to be generated from closed off to wide open.




AMCA Accredited Test Lab


(Test Chamber – continue)


- Nozzles within the chamber are opened up or left closed depending on the air flow capabilities of the fan.
- Enough nozzles are opened to handle the theoretical wide-open flow for the fan being tested.
- Some nozzles will have to be closed to accommodate lower flow conditions being tested

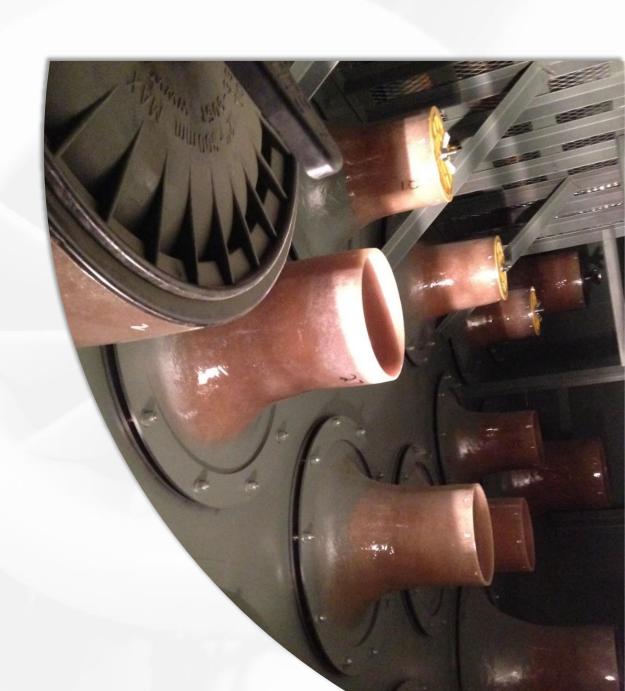



Generating Fan Curves

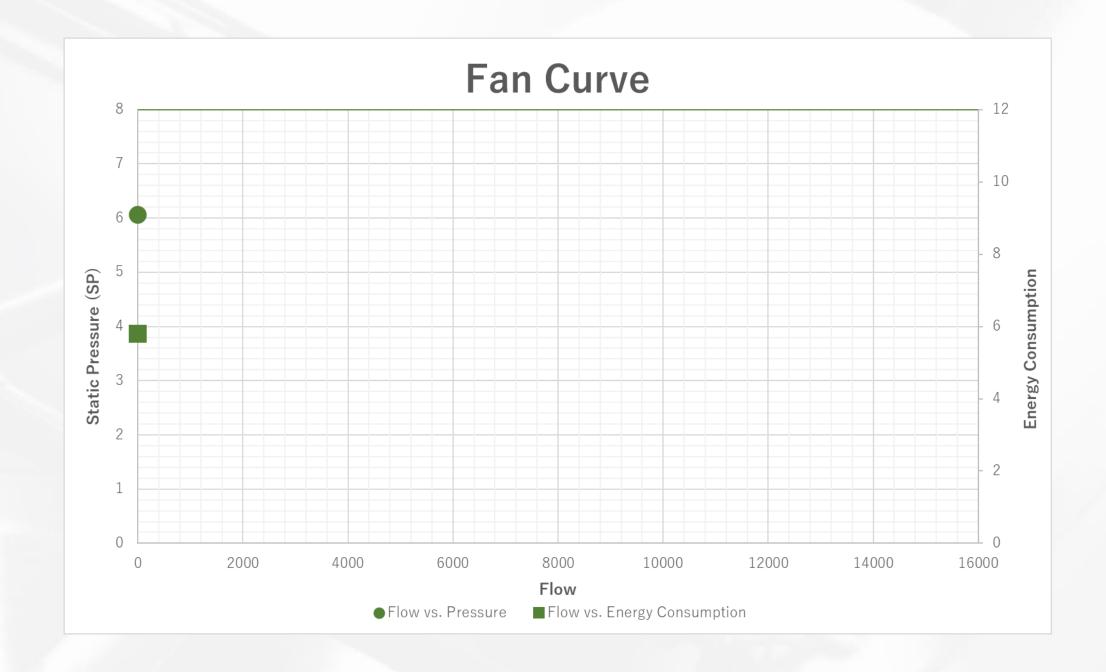


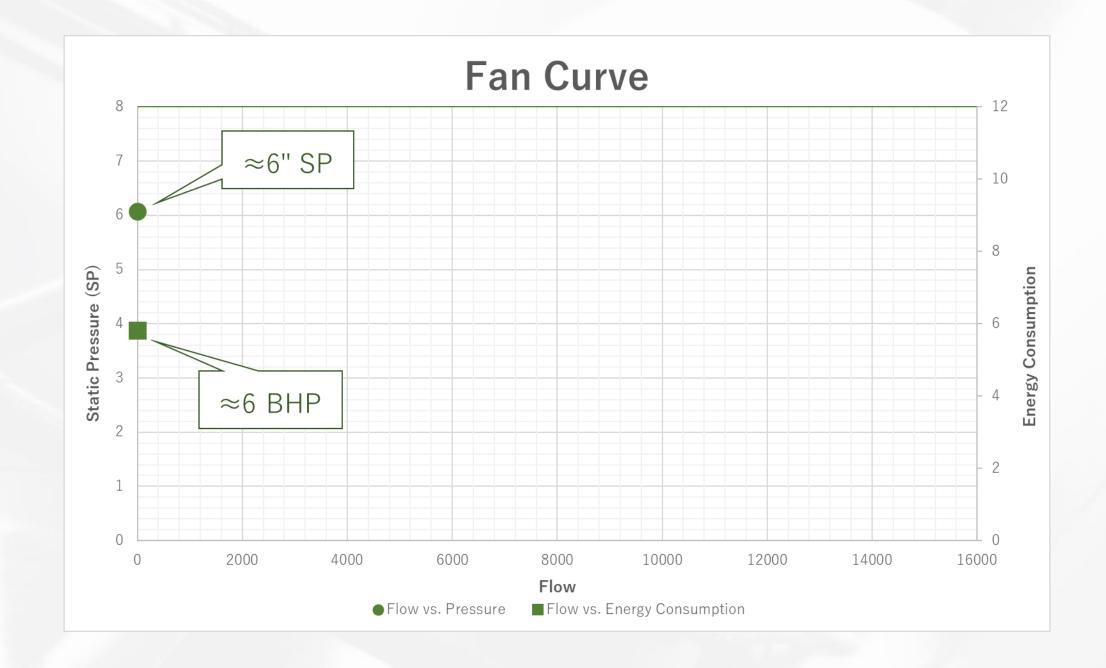

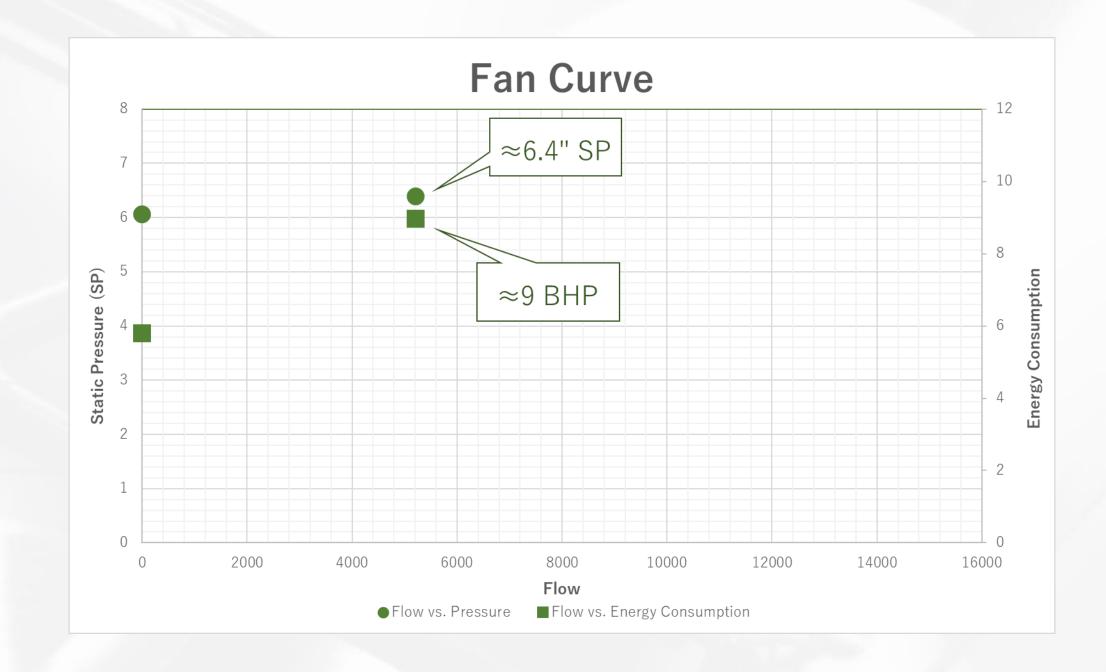


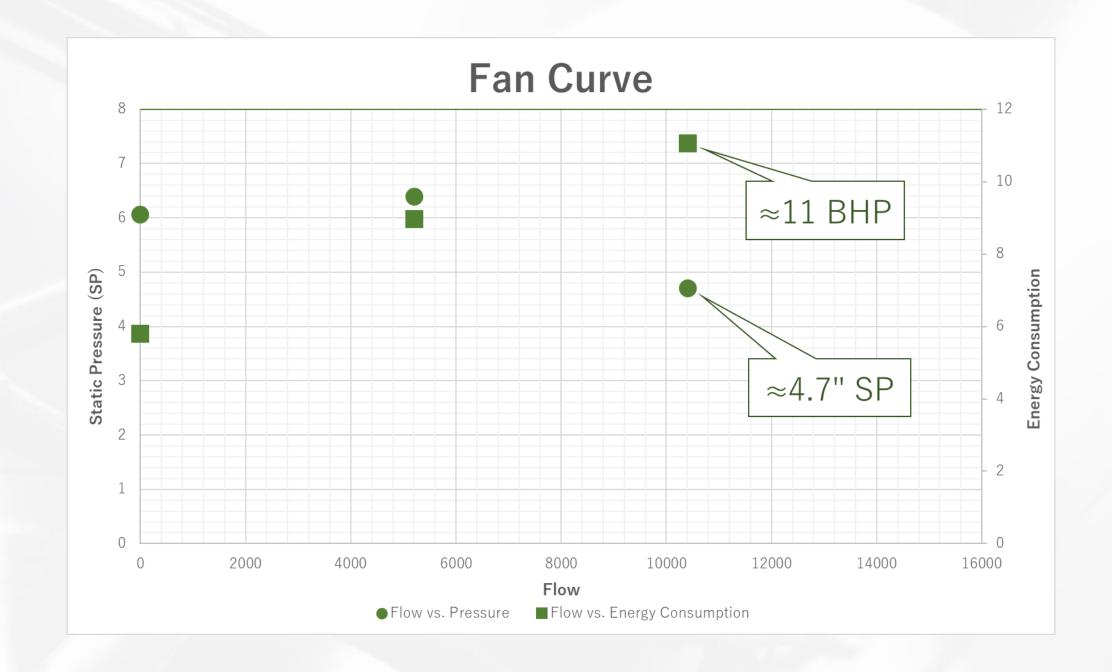


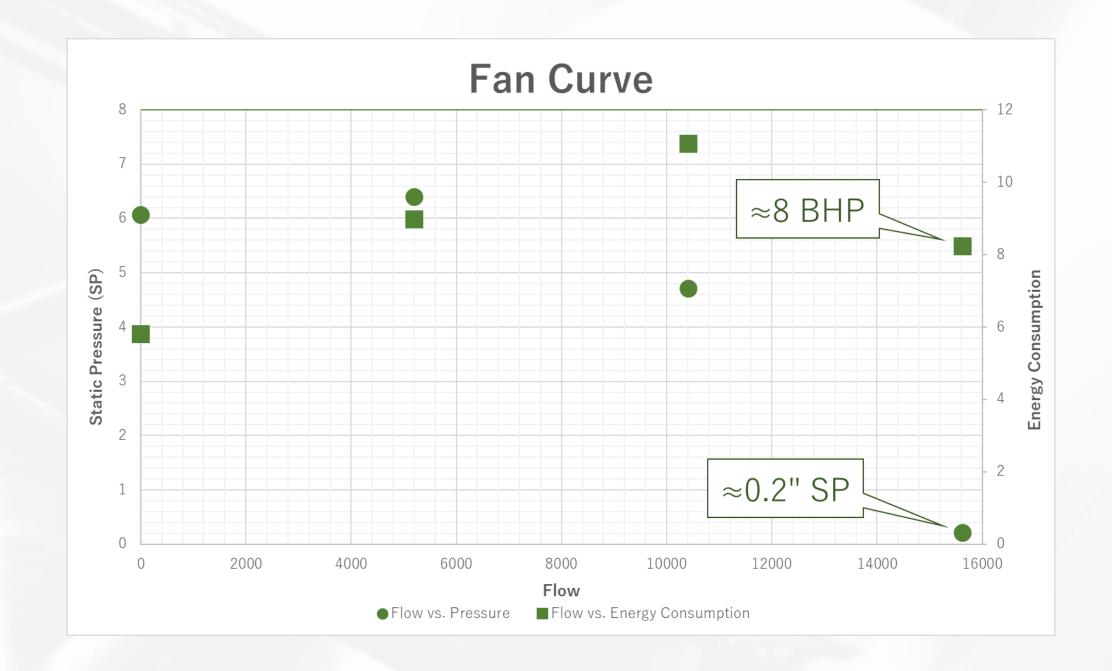


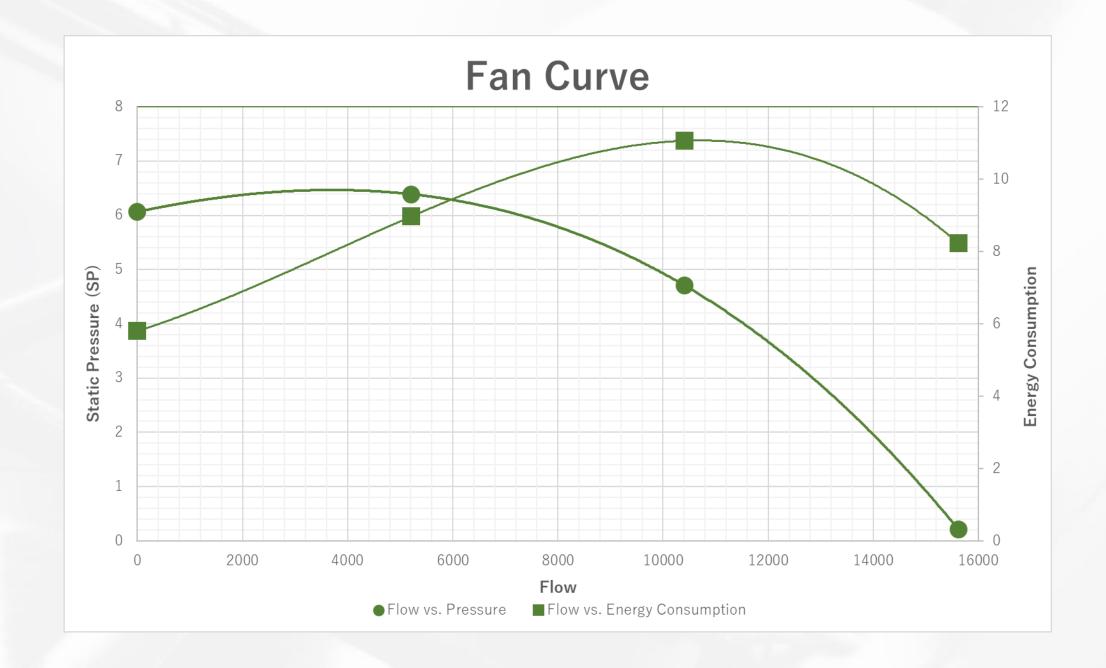



Fan Curves-Operating Point

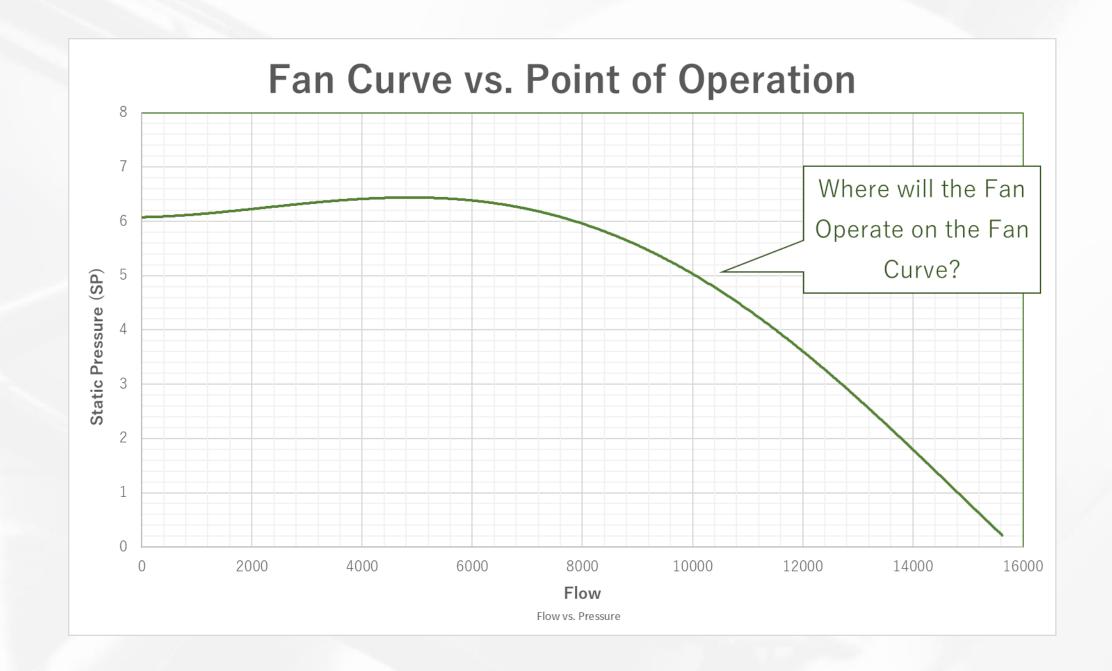

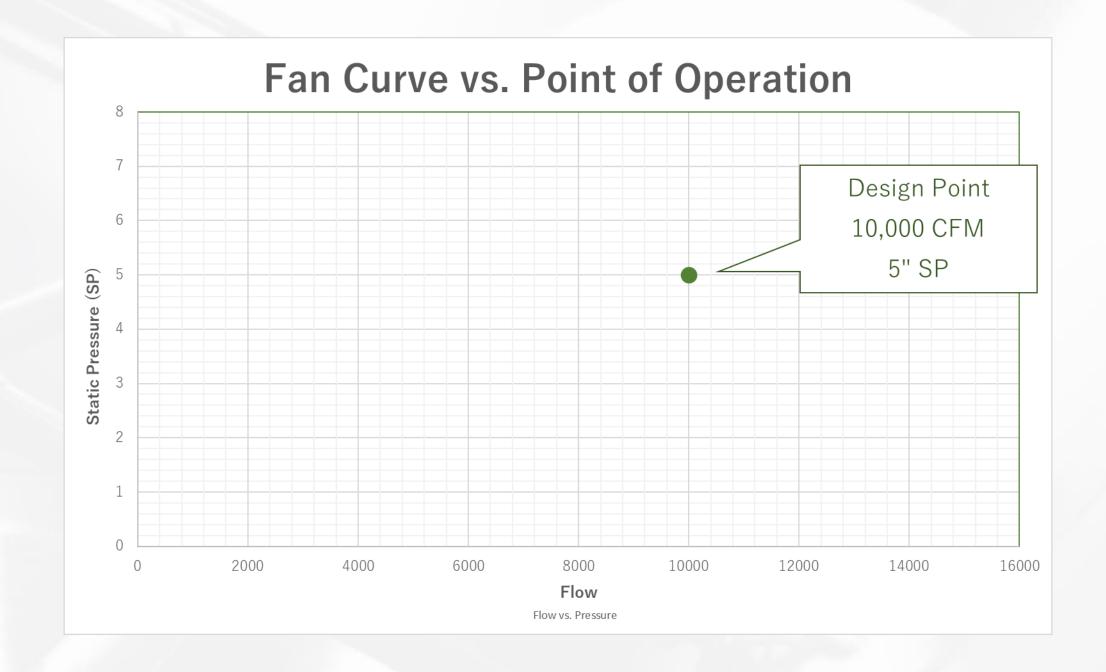

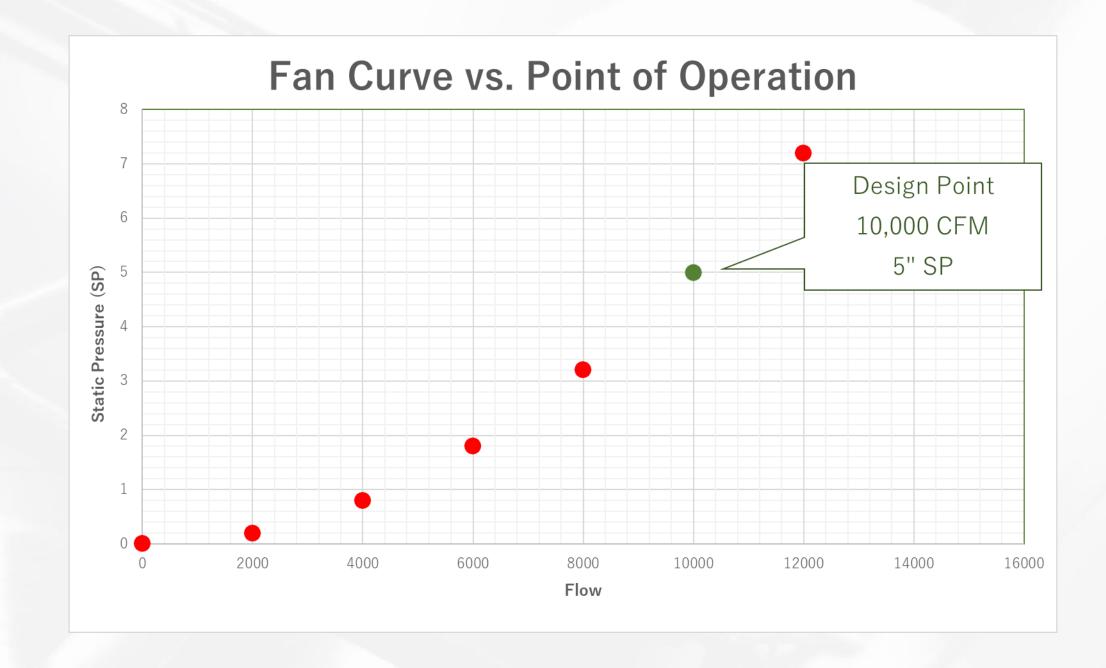

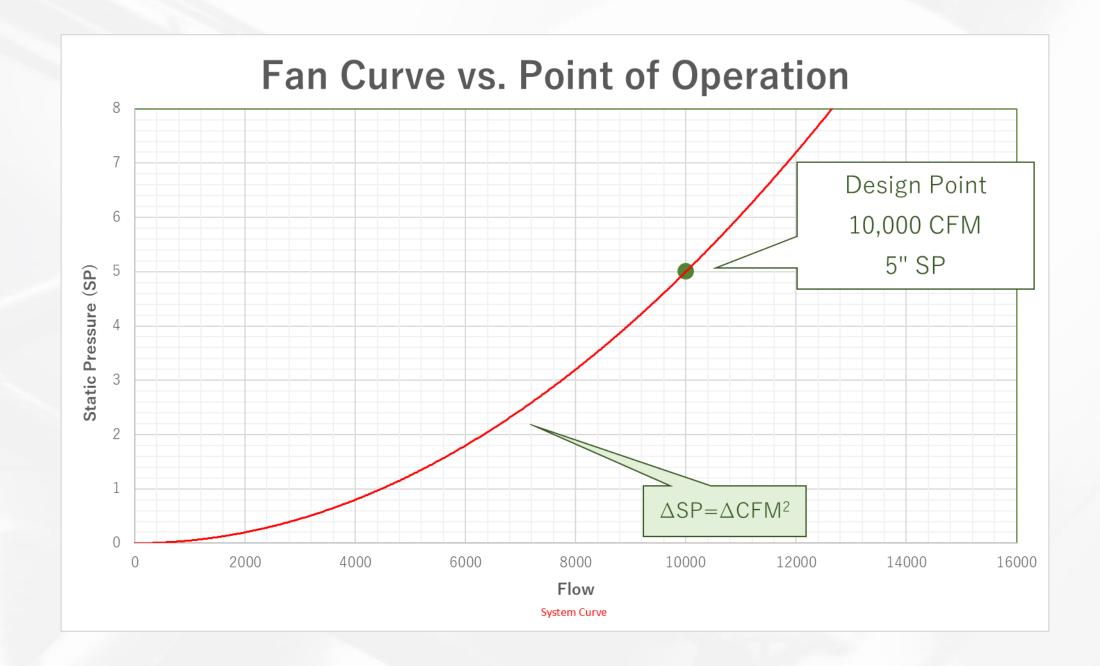

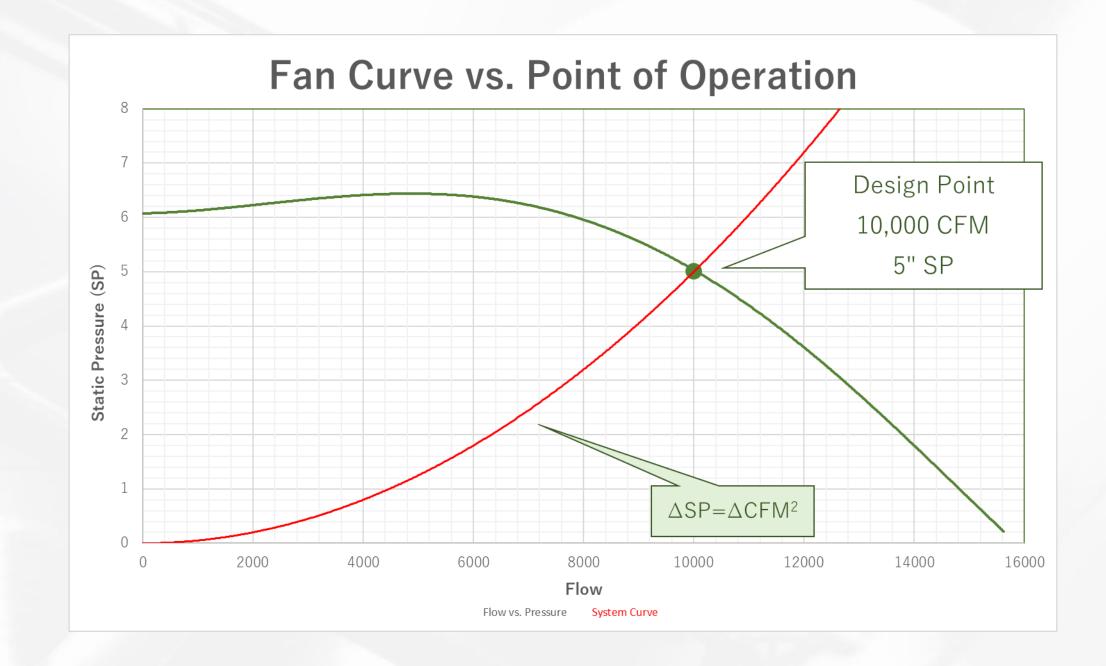


Testing and Rating

Testing and Rating:

Tested:

 In Accordance with AMCA Standard 210 (ASHRAE 51)

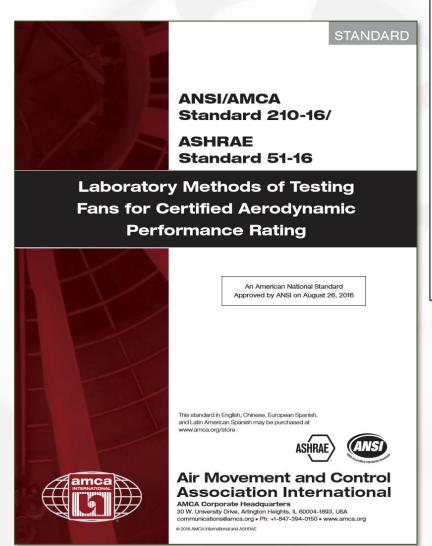




Testing and Rating:

Tested:

 In Accordance with AMCA Standard 210 (ASHRAE 51-07)

Rated:

 In Accordance with AMCA Publication 211

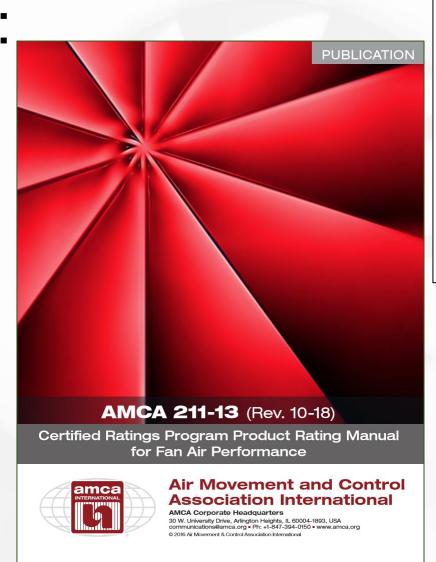




Testing and Rating:


Check Test (AMCA Standard 211):








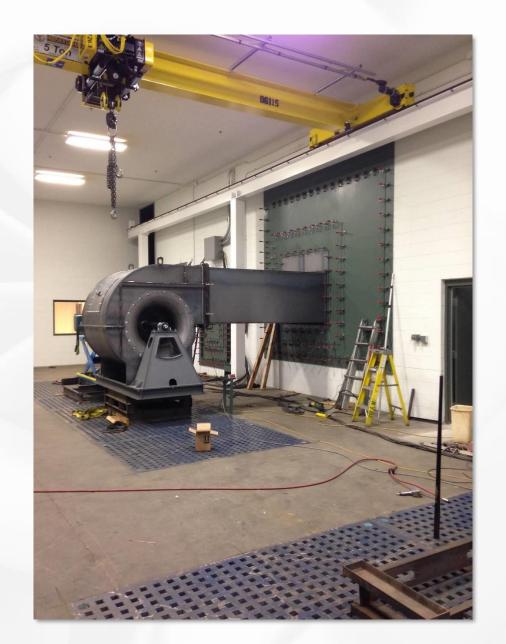

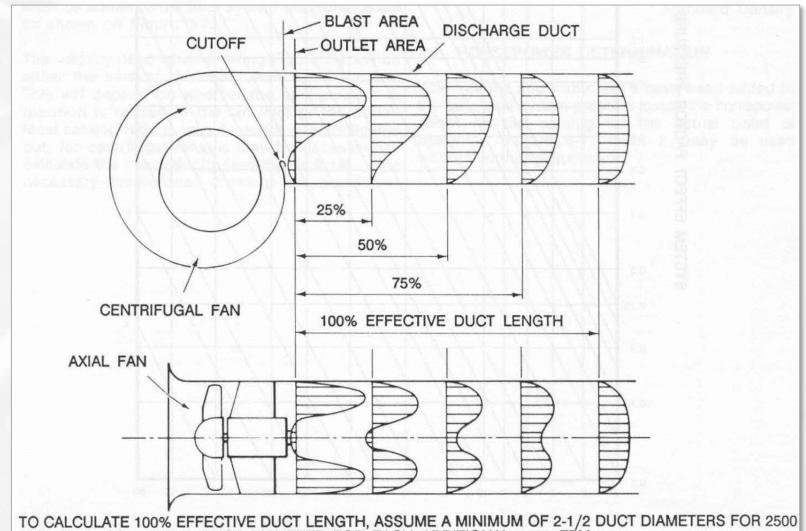

TO CALCULATE 100% EFFECTIVE DUCT LENGTH, ASSUME A MINIMUM OF 2-1/2 DUCT DIAMETERS FOR 2500 FPM OR LESS. ADD 1 DUCT DIAMETER FOR EACH ADDITIONAL 1000 FPM.

EXAMPLE: 5000 FPM = 5 EQUIVALENT DUCT DIAMETERS. IF THE DUCT IS RECTANGULAR WITH SIDE DIMENSIONS a AND b, THE EQUIVALENT DUCT DIAMETER IS EQUAL TO $(4ab/\pi)^{0.5}$

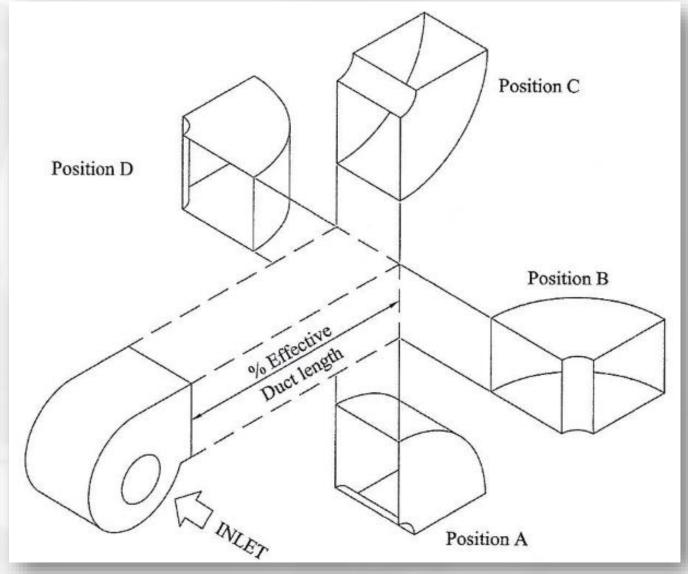

Turned Outlet Away From Neighbors to Reduce Nuisance Noise

Unfavorable conditions:

- Abrupt 90-degree elbow at inlet
- Less than half of surface area of inlet seeing air
- Outlet turned against the rotation of the area

Better solution:

- CW fan
- TH discharge
- Improve inlet condition (larger duct diameter, increased number or gores)



Unfavorable conditions:

- 90-degree turn directly at outlet
- Air turned against rotation of fan
- Rain cover acts as outlet damper directly at outlet of ductwork

Better solution:

- UB fan discharge
- No-loss rain stack



Unfavorable conditions:

- Air turned against rotation of the fan
- Damper placed too close to elbow; laminar flow not yet achieved

Better solution:

- UB fan discharge
- Move damper further from outlet to allow for evening of velocity profile



Unfavorable conditions:


- Poorly designed inlet box
- No outlet ductwork
- No flexible connector on fan inlet

Better solution:

- Factory designed inlet box
- Add for outlet duct
- Add for a flexible inlet connector



- System Modification
- Unfavorable conditions:
 - Exhaust air discharge moved to avoid fresh air intake
 - 90-degree elbow at inlet
 - Quick change of direction after fan outlet
- Better solution:
 - Transition with no-loss stack

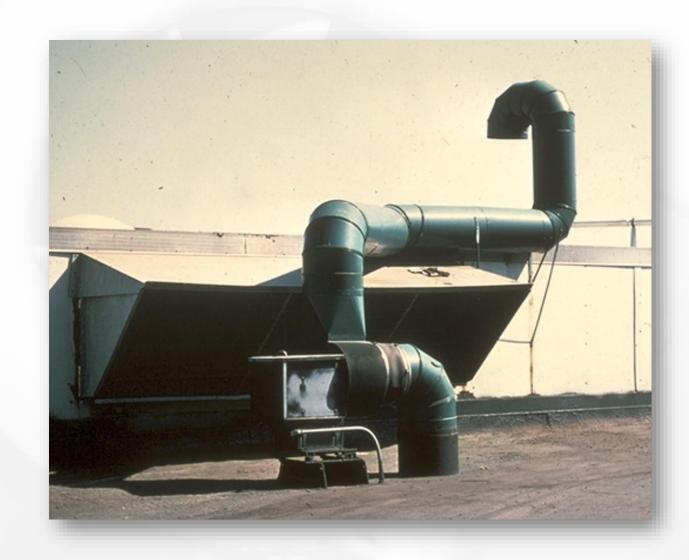

Unfavorable conditions:

- Flimsy mezzanine doubles as flimsy unitary base
- Fan deadheads into a 90-degree round elbow

Better solution:

- Change to CCW TH fan
- Ensure mezzanine is stout and then mount fan on proper unitary base onto mezzanine



System Effects (not actually):

- Material Handling Fan
- Fan Operating Backwards



- Silencer at the fan inlet reduces transmitting of sound into factory
- Rectangular to round transition
- No loss rainhood



System Effect Demonstration


System Effects Video:

- Fan
- Open Inlet
- Ducted Outlet
- Pitot Tube (can't see)
- Damper
- Magnehelic



Topics:

- 90° Elbow
- Corkscrews
- Inlet Boxes
- Straight Runs of Ductwork
- Discharge Ductwork (straight runs)
- Discharge Elbows

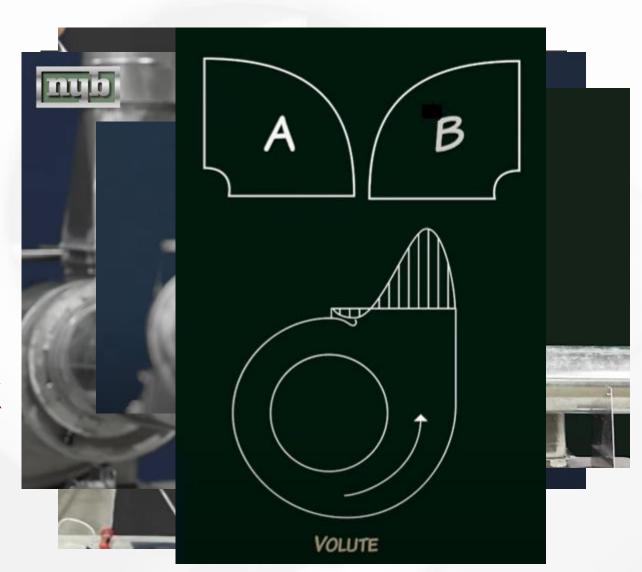



System Effect 90° Elbow

Non-Vaned Elbows vs. Vaned Elbows

System Effect Corkscrews

Corkscrews

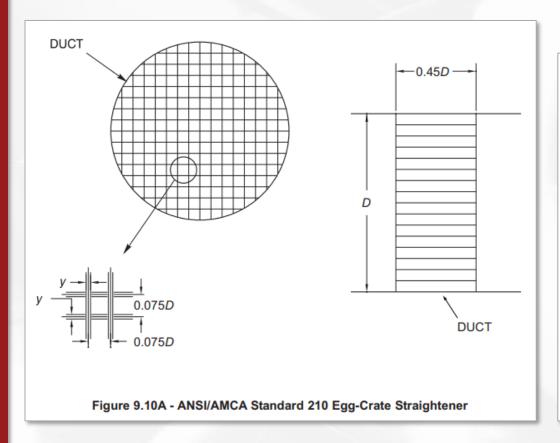

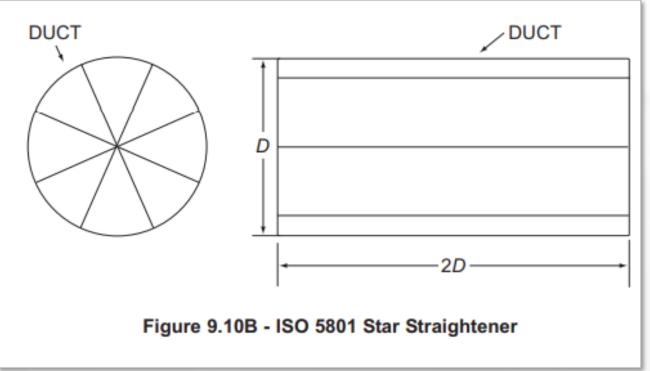


System Effect Inlet Boxes

Inlet Boxes



System Effect Straight Runs of Ductwork


Straight Runs of Ductwork




h_e= 0.93 VP_d PLAIN DUCT END



h_e= 0.49 VP_d FLANGED DUCT END

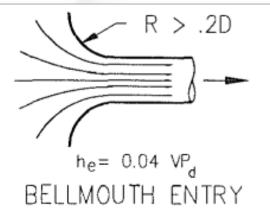


System Effects Video:

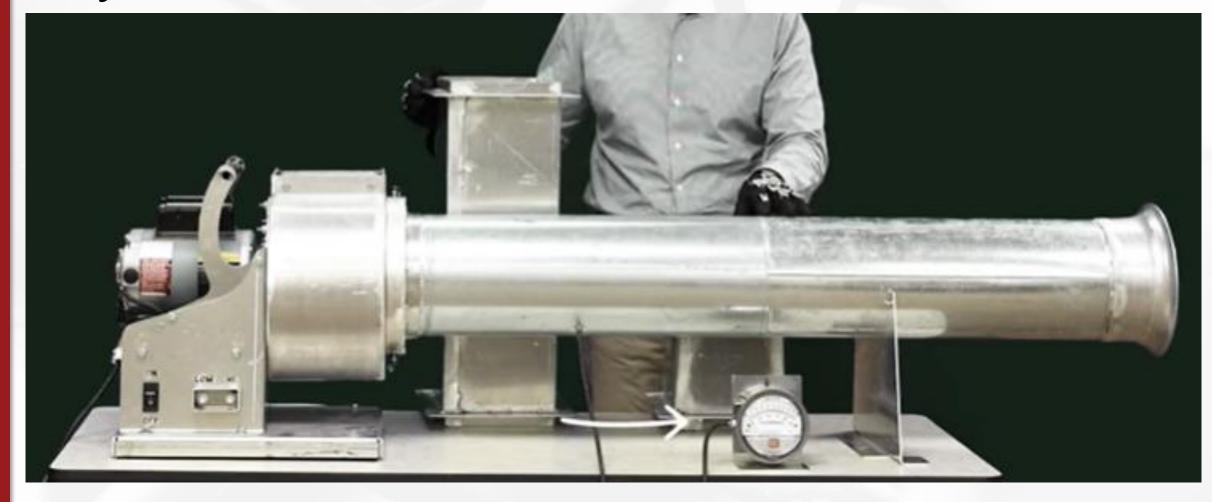

System Effect Discharge Duct

Discharge Ductwork (straight runs)

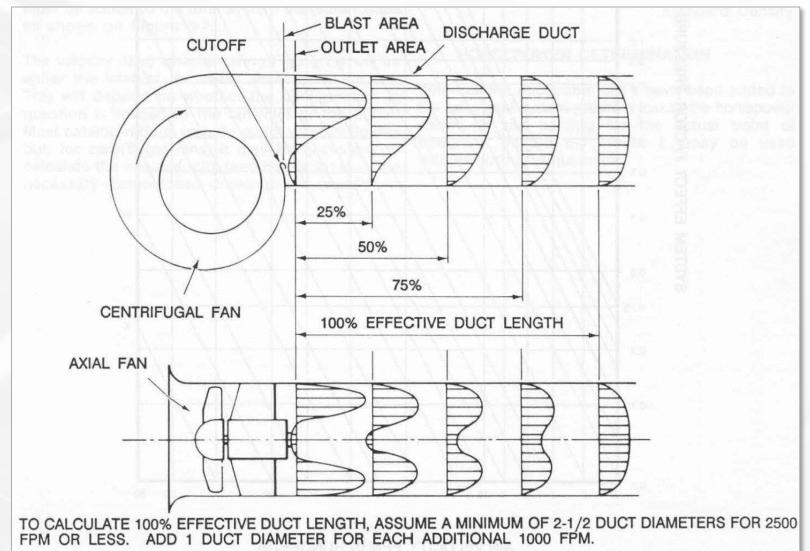


EXAMPLE: 5000 FPM = 5 EQUIVALENT DUCT DIAMETERS. IF THE DUCT IS RECTANGULAR WITH SIDE DIMENSIONS a AND b, THE EQUIVALENT DUCT DIAMETER IS EQUAL TO $(4ab/\pi)^{0.5}$



System Effect Discharge Elbows

Discharge Elbows

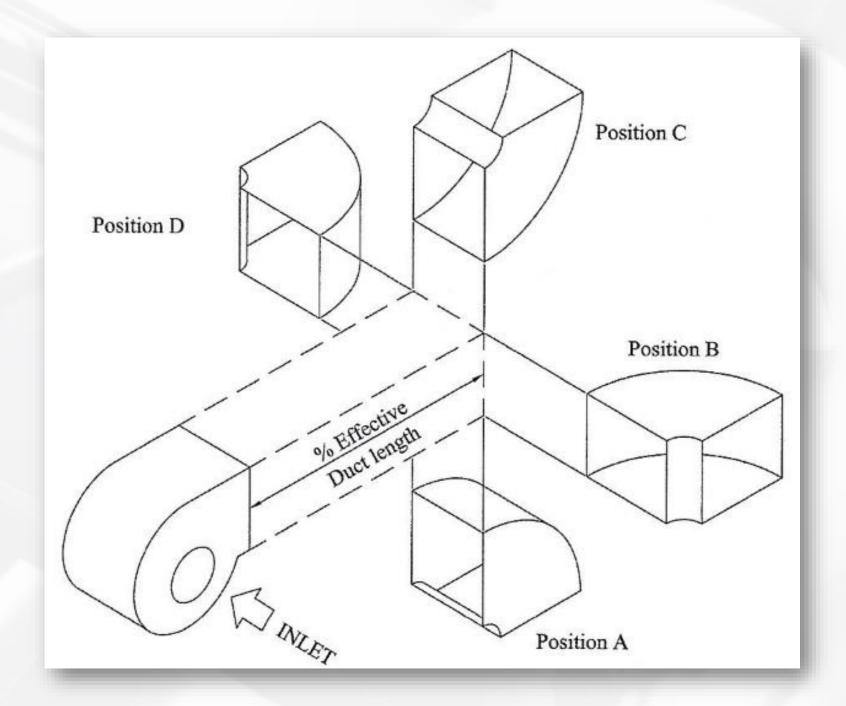

Fonts of System Information

26,000 CFM ≈ 1 ton/minute
4,000 ft/min ≈ 45 mph
Straight Duct vs. Curved Duct
(straight road vs. curvy roads)
1 BHP Costs ≈ \$600-\$800/year

Resources

- AMCA International: www.amca.org
- AMCA Publications: <u>www.amca.org/store</u>
 - > 201-02: Fans and Systems (Available for purchase)
 - > 211-13: Certified Ratings Program Product Rating Manual for Fan Air Performance (Free PDF download available)
- ANSI/AMCA Standard 210 / ASHRAE 51-16: www.amca.org/store
 - > Laboratory Methods of Testing Fans for Certified Aerodynamic Performance Rating (Available for purchase)
- AMCA Video Library: <u>System Effect</u>
 - > System Effect A brief explanatory video outlining the system effect phenomena (Free video)

Resources

- Nyb Videos:
 - The New York Blower Company YouTube
- Nyb Engineering Letters:
 - Engineering Letters for Industrial Fans | New York Blower
- Fan Fundamentals:
 - New to Fans? Start Here. | New York Blower Company (nyb.com)
- Fan Selection Software:
 - New York Blower Fan-to-Size On the Web

Q&A

Survey QR Code:



Thank you for your time!

To receive PDH credit for today's educational session, you must complete the online evaluation, which will be sent to you via email within 7 days of this program.

PDH credits and participation certificates will be issued electronically within 30 days, once all attendance records are checked and the completed online evaluations are received.

Attendees will receive an email at the address provided on your 2022 AHR Expo registration, listing the total credit hours awarded and a link to a printable certificate of completion.

If you have any questions, please contact Lisa Cherney, Education Manager, at AMCA International (Icherney@amca.org).